

These levellers fulfill the stringent mechanical and electrical characteristics that are required by your customers. In the event that a custom leveller is required, please forward the specifications.



**MECHANICAL**

Part no.	Fig.	Thread Size	A Dim.	B Dim.	C Dim.	D Dim.
PLF- 26-375	1	3/8-16	1.500	.500	2.400	1/4 SQ.
PLF-29-375	2	3/8-16	1.500	.500	3.000	1/4 SQ.
PLF-28-500	3	1/2-13	1.500	.400	2.750	

**LOAD TESTED BY: TINIUS OLSEN SUNER APPARATUS**

PART NO.	MAX LOAD
PLF-26-375	2400 LBS.
PLF-29-375	2400 LBS.
PLF-28-500	9200 LBS.

**ELECTRICAL TEST**

DIELECTRIC WITHSTANDING VOLTAGE AT 20°C 50% & RELATIVE HUMIDITY NO LOAD.

**PART NO.**

PLF-26-375	5000 V DC min.
PLF-29-375	5000 V DC min.
PLF-28-500	3000 V DC min.

**PLATING**

Are plated to ASTM - B - 633  
Zinc Electroplated Coating passivated  
colour yellow iridescent.

FIGURE - 1

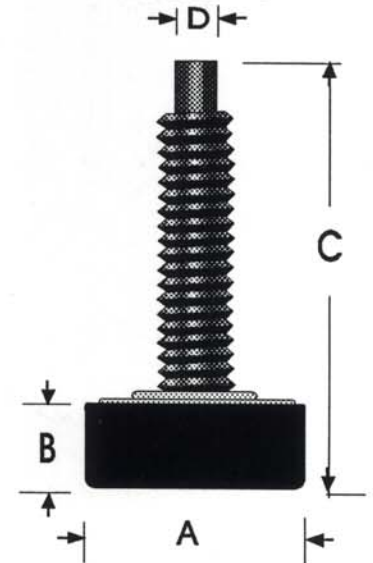


FIGURE - 2

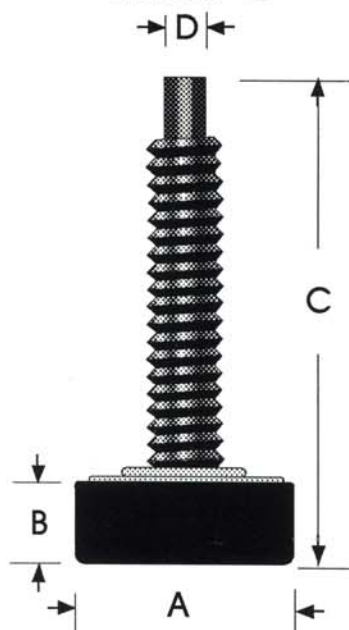


FIGURE - 3

